





Order example

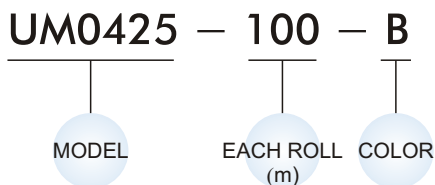

Burst pressure curve (Reference value)

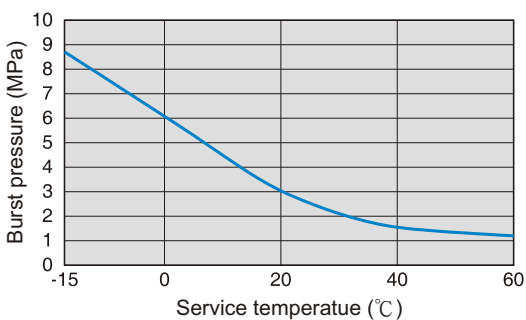

Specification

Model	UM
Medium	Air
Max. pressure range	116 psi (0.8MPa)(65%RH at 20°C)*1
Working vacuum	- 29.5in.Hg (- 100kPa)
Ambient temperature	- 5~ + 140°F (- 15~ + 60°C) (No freezing)

*1. Max. pressure range is the value at 65% RH at 20°C. When using on other temperatures, please take enough safety value judging from the burst pressure curve on the left. When the tube is applied to moving parts with vibration and bend, the temperature might rise due to self-heat generation due to molecule heat generation and lead to breakage of the tube.

Mindman brand PU tube

Model	ID × OD (mm)	Each roll (m)	Available color
UM0425	2.5 × 4	100	B, BU, CB, O, G, Y, R, T
UM0640	4 × 6	100	B, BU, CB, O, G, Y, R, T
UM0850	5 × 8	100	B, BU, CB, O, G, Y, R, T
UM1065	6.5 × 10	100	B, BU, CB, O, G, Y, R, T
UM1280	8 × 12	100	B, BU, CB, O, G, Y, R, T

Available color :

- Black(B), ● Blue(BU), ● Transparent blue(CB), ● Orange(O), ● Green(G), ● Yellow(Y), ● Red(R), ○ Transparent(T)


Measurement of minimum bending radius and minimum mounting radius

Model	Min.bending radius (mm)	Min.mounting radius (mm)	Weight (g/m)
UM0425	10	15	9
UM0640	15	23	19
UM0850	15	23	36
UM1065	20	30	54
UM1280	30	45	74

Minimum bending radius (JIS method)

JIS method (based on JIS B8381)

The mandrel radius is measured when the tube is tightly wound around mandrel (round bar) and the deforming ratio becomes 25%. Measurement condition: 20°C, 65%RH

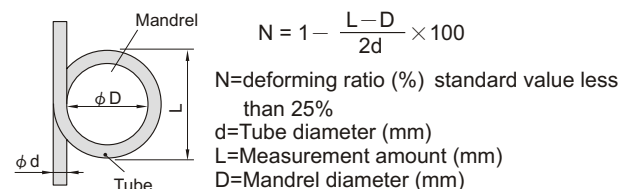

Minimum mounting radius (Vice method)

