

# MAF401 series

## AIR UNIT (FILTER)




mindman

### Specification

Model	MAF401		
Bore No.	8A	10A	15A
Port size	1/4	3/8	1/2
Medium	Air		
Operating pressure range (※1.2.)	0.05~1.5 MPa		
Proof pressure	2 MPa		
Ambient temperature	-5~+60°C (No freezing)		
Filter element	Standard: 40 μm, Option: 5 μm		
Max. flow rate (※3) ℓ/min.(ANR)	1300	2000	2500
Weight	480 g		



### Symbol



※1. Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.

※2. Choose auto-drain FMRF300, the pressure range is 0.15 ~ 1 MPa.

※3. Flow is at pressure P=0.7 MPa with pressure drop ΔP=0.03 MPa.

### Order example

MAF401 - 8A - □ - D - □ - □ - □

MODEL

BORE SIZE

8A: 1/4  
10A: 3/8  
15A: 1/2

EXTERIOR COLOR

Blank: Black & silver  
W: Gray & white

FILTER ELEMENT

Blank: 40 μm  
5u: 5 μm




PORT THREAD

Blank: Rc thread  
G: G thread  
NPT: NPT thread

D: Auto drain valve (FMRF300)

B: C type bracket

### Flow feature

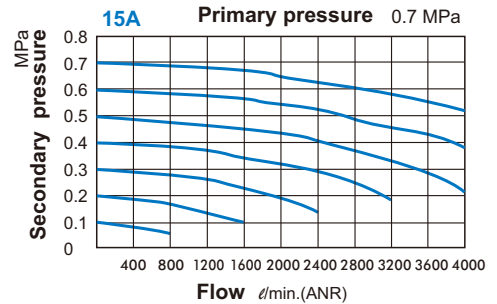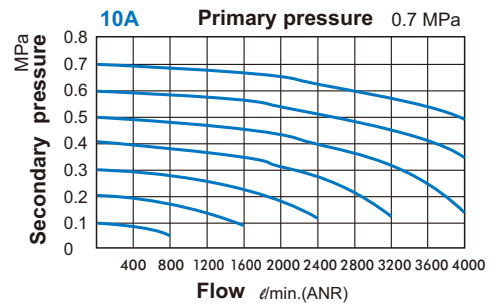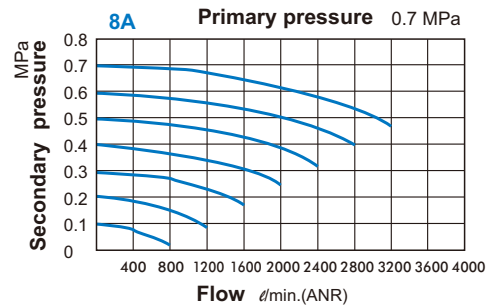

### Option accessories

#### C type bracket

