


Trapezoidal Nut Type MLN-FB Bronze Flanged Nut

Material: EN 1982 Cu Sn5 Zn5 Pb5-C - CC491K

Bronze flanged nut for movement with good wear resistance. Good lubrication is recommended.

Chamfer 1x45°

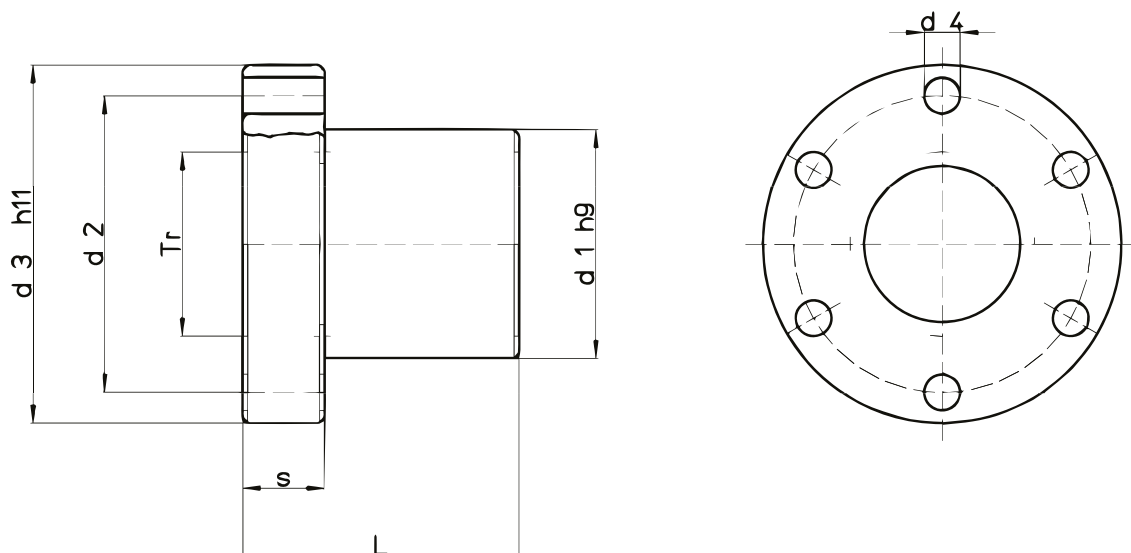

Nut Stock no. RIGHT	Nut Stock no. LEFT	Diameter x Lead	Thread Starts	d1 mm	d2 mm	d3 mm	d4 mm	L mm	S mm	no. screw holes	Screws of fixing (class 8.8)	Wt. kg/each	At mm ² (1)
MLN-FB 10 2 R	MLN-FB 10 2 L	Tr 10 x 2	1	25	34	42	5	25	10	6	M6	0.164	250
MLN-FB 12 3 R	MLN-FB 12 3 L	Tr 12 x 3	1	28	38	48	6	35	12	6	M6	0.276	400
MLN-FB 12 6 R	-	Tr 12 x 6 (P3)	2	28	38	48	6	35	12	6	M6	0.276	400
MLN-FB 14 3 R	MLN-FB 14 3 L	Tr 14 x 3	1	28	38	48	6	35	12	6	M6	0.272	460
MLN-FB 14 6 R	-	Tr 14 x 6 (P3)	2	28	38	48	6	35	12	6	M6	0.272	460
MLN-FB 16 4 R	MLN-FB 16 4 L	Tr 16 x 4	1	28	38	48	6	35	12	6	M6	0.26	530
MLN-FB 16 8 R	-	Tr 16 x 8 (P4)	2	28	38	48	6	35	12	6	M6	0.26	530
MLN-FB 18 4 R	MLN-FB 18 4 L	Tr 18 x 4	1	28	38	48	6	35	12	6	M6	0.247	610
MLN-FB 18 8 R	-	Tr 18 x 8 (P4)	2	28	38	48	6	35	12	6	M6	0.247	610
MLN-FB 20 4 R	MLN-FB 20 4 L	Tr 20 x 4	1	32	45	55	7	44	12	6	M6	0.37	870
MLN-FB 20 8 R	-	Tr 20 x 8 (P4)	2	32	45	55	7	44	12	6	M6	0.37	870
MLN-FB 22 5 R	MLN-FB 22 5 L	Tr 22 x 5	1	32	45	55	7	44	12	6	M6	0.36	1030
MLN-FB 22 10 R	-	Tr 22 x 10 (P5)	2	32	45	55	7	44	12	6	M6	0.36	1030
MLN-FB 24 5 R	MLN-FB 24 5 L	Tr 24 x 5	1	32	45	55	7	44	12	6	M6	0.337	1040
MLN-FB 24 10 R	-	Tr 24 x 10 (P5)	2	32	45	55	7	44	12	6	M6	0.337	1040
MLN-FB 26 5 R	MLN-FB 26 5 L	Tr 26 x 5	1	38	50	62	7	46	14	6	M6	0.516	1280
MLN-FB 28 5 R	MLN-FB 28 5 L	Tr 28 x 5	1	38	50	62	7	46	14	6	M6	0.472	1200
MLN-FB 28 10 R	-	Tr 28 x 10 (P5)	2	38	50	62	7	46	14	6	M6	0.472	1200
MLN-FB 30 6 R	MLN-FB 30 6 L	Tr 30 x 6	1	38	50	62	7	46	14	6	M6	0.472	1370
MLN-FB 12 B R	-	Tr 30 x 12 (P6)	2	32	50	62	7	46	14	6	M6	0.472	1370
MLN-FB 32 6 R	MLN-FB 32 6 L	Tr 32 x 6	1	45	58	70	7	54	16	6	M6	0.779	1710
MLN-FB 32 12 R	-	Tr 32 x 12 (P6)	2	45	58	70	7	54	16	6	M6	0.779	1710
MLN-FB 36 6 R	MLN-FB 36 6 L	Tr 36 x 6	1	45	58	70	7	54	16	6	M6	0.694	1950
MLN-FB 36 12 R	-	Tr 36 x 12 (P6)	2	45	58	70	7	54	16	6	M6	0.694	1950
MLN-FB 40 7 R	MLN-FB 40 7 L	Tr 40 x 7	1	63	78	95	9	66	16	6	M6	1.788	2650
MLN-FB 40 14 R	-	Tr 40 x 14 (P7)	2	63	78	95	9	66	16	6	M6	1.788	2650
MLN-FB 44 7 R	MLN-FB 44 7 L	Tr 44 x 7	1	63	78	95	7	66	16	6	M6	1.657	2940
MLN-FB 50 8 R	MLN-FB 50 8 L	Tr 50 x 8	1	72	90	110	11	75	18	6	M6	2.500	4540
MLN-FB 60 9 R	MLN-FB 60 9 L	Tr 60 x 9	1	88	110	130	13	90	20	6	M6	4.260	5490
MLN-FB 70 10 R	MLN-FB 70 10 L	Tr 70 x 10	1	95	120	140	13	105	22	6	M6	5.303	7500

(1) Total bearing surface between screw and nut teeth on plane perpendicular to axis.