


MACP501 series

AIR UNIT (F.R.L.UNIT)



Option: **MP41**

Symbol



Specification

Model	MACP501	
Components	MAFR501, MAL501	
Bore No.	20A	25A
Port size	3/4	1
Medium	Air	
Operating perssure range (*)	0.05~1 MPa	
Proof pressure	1.5 MPa	
Regulated pressure range	0.05~0.85 MPa	
Ambient temperature	- 5~+60°C (No freezing)	
Filter element	40μm	
Lubricating oil capacity	200c.c	
Min. flow for oil drip	25 ℓ/min	33 ℓ/min
Recommended lubricating oil	Turbine oil ISO-VG32	
Attachment	Pressure gauge (PG-20), bracket	
Weight	Nylon bowl, PC bowl: 3480 g	
	Metal bowl: 3720 g	

* Standard unit contains semi-auto-drain function when operating pressure below 0.05 MPa.

* Choose auto-drain FMRF300, the pressure range is 0.15~1 MPa.

Order example

MACP501 – 20A – □□ – E1 – T8 – □

MODEL

PORT SIZE

20A: 3/4
25A: 1

Blank: PC bowl
M: Metal bowl
N: Nylon bowl

(Option)
PRESSURE
SWITCH

E1: MP41P-022
E2: MP41P-022-QD
E5: MP41P-042
E6: MP41P-042-QD

(Option)
Module
mounting bracket

T8: 1/4
T10: 3/8
T15: 1/2

PORT THREAD

Blank: Rc thread
G: G thread
NPT: NPT thread

Blank: Semi-auto drain



C: External pressure gauge (PG-40)
D: Auto drain valve (FMRF300)

* Metal bowl (M) and nylon bowl (N) can not be selected at the same time.

* PG-40 (C) and MP41 (E*) can not be selected at the same time.

* Refer to page 5-11 for the option of digital pressure switch MP41 (E*).

Flow feature

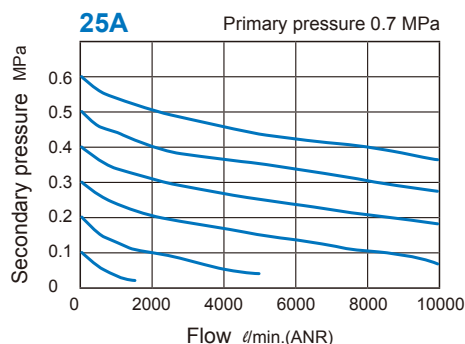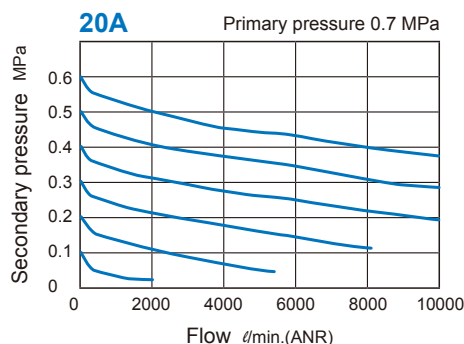



MACP501 Dimensions

AIR UNIT (F.R.L.UNIT)





MACP501-D

Auto drain valve

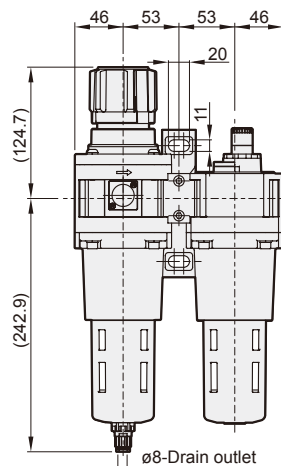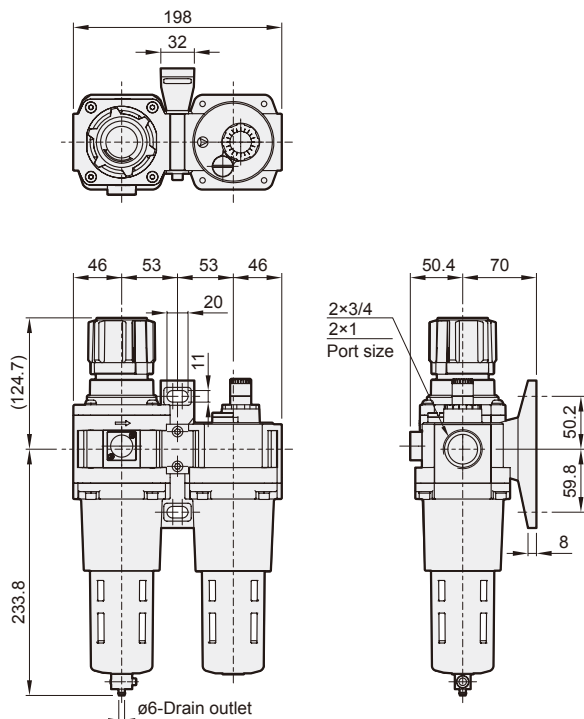

MACP501-T*



T type bracket

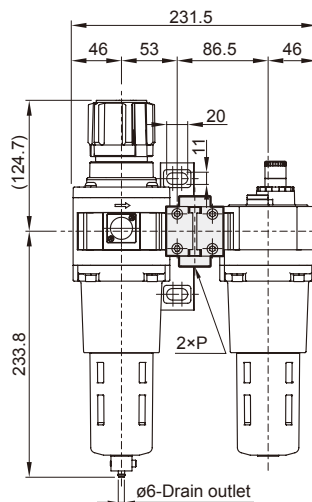

Port Bracket	P
T8	1/4
T10	3/8
T15	1/2

MACP501-M

Metal bowl

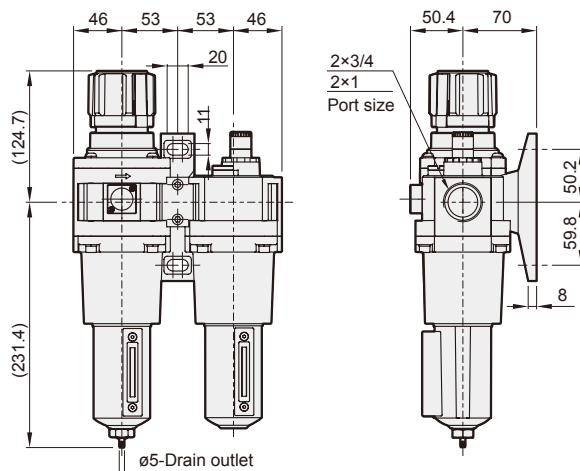

MACP501-MD

Metal bowl + auto drain valve

